

AQUABION®

Galvanic Water Treatment

Without chemicals or external power supply




water treatment
worldwide

Technical sheet

AQUABION® AB-S20



Pressure drop at type AB-S20

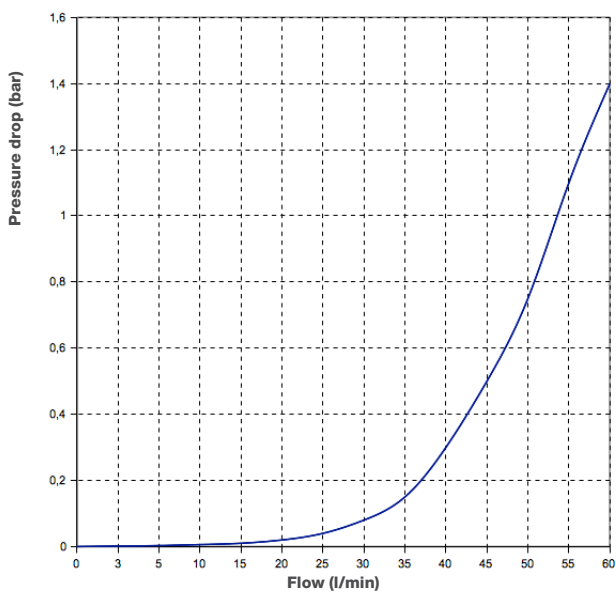

Internal diameter	3/4" DN20
-------------------	-----------

Connection	female
Length	180 mm
Body diameter	45 mm
Weight	1,64 kg
Maximum pressure	16 bar
Nominal flow at 2m/s	1,5 m³/h
Pressure drop at nominal flow	0,04 bar

Material	Body	CW510L
----------	------	--------

Internal parts	Zinc anode	Zn2 DIN EN 1179
	Swirling body	1.4301
	Sealing ring	PTFE

Construction	The body of the device consists of a single sleeve with two threaded nipples	
--------------	--	--

Temperatures of use	Warm water:	
	- stored	85°C
	- circulating	85°C

IMPORTANT: AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

